

American River Parkway Bridge Railing Replacement Project



Background

- There are several different types of bridge railings on the American River Parkway, including:
 - Cyclone Fencing
 - Tubular Fencing
 - Post & Cable
 - Wood Fencing
 - Removable Steel Post & Cable
- These railings are in different stages of disrepair, and this project will remove existing railings and replace them with a standard railing panel.

Existing Railings



Mile 3



Mile 4



Mile 7

Existing Railings



Mile 11



Mile 15

Mile 16.5



Existing Railings




Mile 18.5

Mile 20



Mile 22

Proposed New Railing Panels

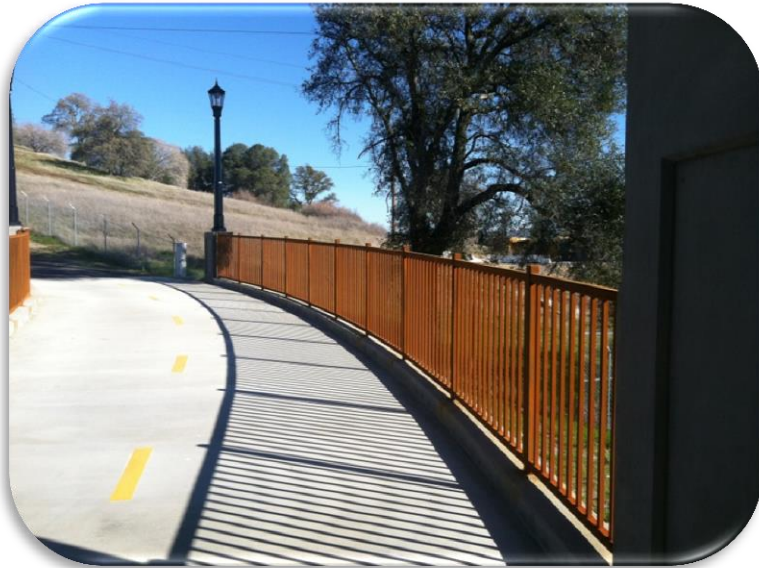

Railing Replacement Project

- This project will replace the existing railings with a standard railing panel.
- Panels measure $46 \frac{1}{2}$ tall x $68 \frac{1}{4}$ wide. Top and bottom rails are $1 \frac{3}{4}$. Side rails are $2 \frac{1}{2}$. Inside rails are $1 \frac{1}{4}$.
- The rails are unpainted, to blend in with the natural surroundings
- Project will be funded by Measure A